

# IRSP

**THE  
PROFESSIONAL  
SOLUTION**

**ANTI CUT THROUGH  
INSULATED ROLLER SHUTTERS**

**SHUTTER CURTAIN**

Constructed from pre-galvanised material, Ecotech formula foam infill - CFC free/ODP zero with a low global warming potential value of 3. Each panel section is 100mm deep with twin-ribbed face for rigidity. Each alternate panel is to include advanced bonded composite anti-cut bars over the bottom 1.8 metres with added side load fittings.

**OPERATION**

The door is arranged for an electric motor unit with manual hand hoisting and lowering facility. The motor unit is complete with an in-built safety drive system. Operating voltage 400V 3 phase IP54 protection 60% duty cycle maintenance free and TUV tested, complying with all current European safety standards.

**ORDER INFORMATION**

JOB No:

ORDER No:

OPENING HEIGHT:

OPENING WIDTH:




GUIDE TYPE:

DELIVERY DATE:

DELIVERY ADDRESS:

GENERAL NOTES:

## SECUREFLEX - THE PROFESSIONAL SOLUTION

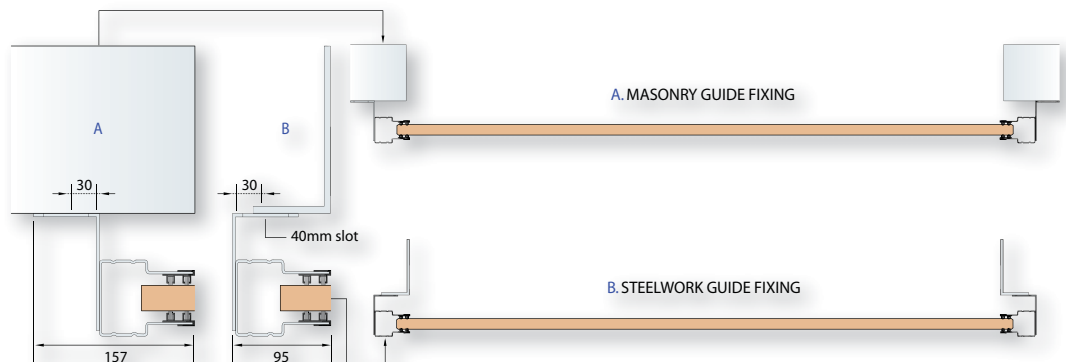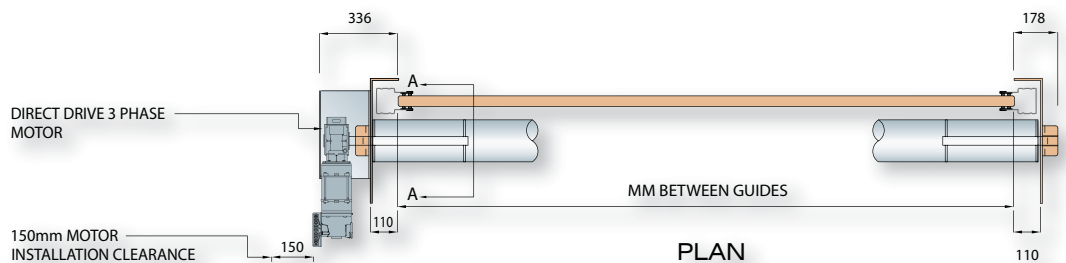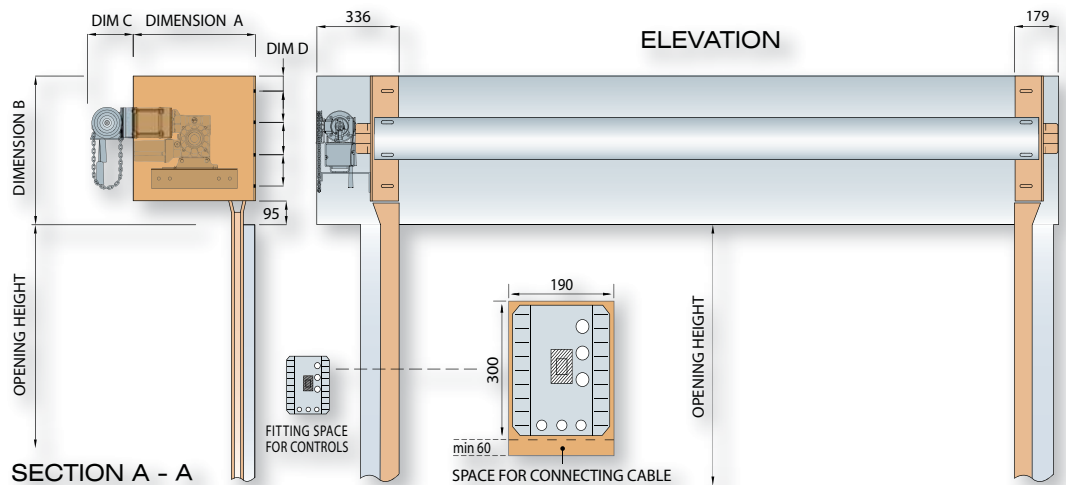

WIDTH	HEIGHT	DIM A	DIM B	DIM C	DIM D
2500	2500	450	525	196	35
4000	4000	500	595	259	60
5000	5000	550	645	209	85
6000	6000	550	645	283	85

Door hood addition - Dim B + 50      All Dimensions in mm



# SECUREFLEX