

**THE
'SIMPLE'
SOLUTION**

UN-INSULATED ROLLER SHUTTER SHUTTER CURTAIN

Constructed from interlocking pre-galvanised scrolled steel lath. Each alternate lath being complete with pressed steel endlock securely riveted at either end. The curtain would also be complete with a standard pre-galvanised 'T' bottom section with interlocking (EPDM) rubber seal.

OPERATION

The door is arranged for an electric motor unit with manual hand hoisting and lowering facility. The motor unit is complete with an in-built safety drive system. Operating voltage 400V 3 phase IP54 protection 60% duty cycle maintenance free and TUV tested, complying with all current European safety standards.

ORDER INFORMATION

JOB No:

ORDER No:

OPENING HEIGHT:

OPENING WIDTH:




GUIDE TYPE:

DELIVERY DATE:

DELIVERY ADDRESS:

GENERAL NOTES:

STEELEX - THE SIMPLE SOLUTION

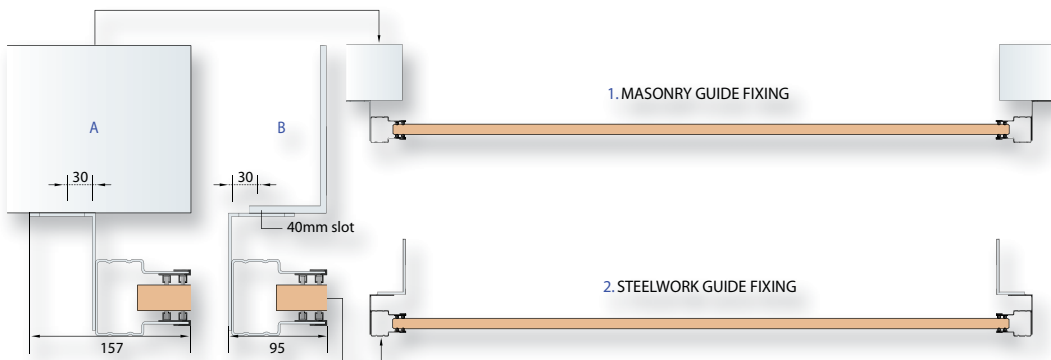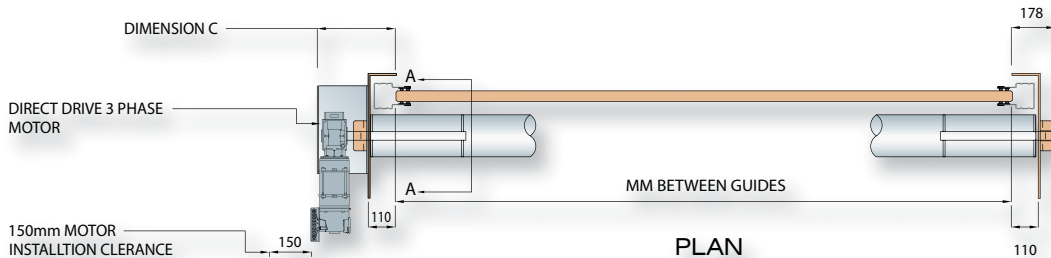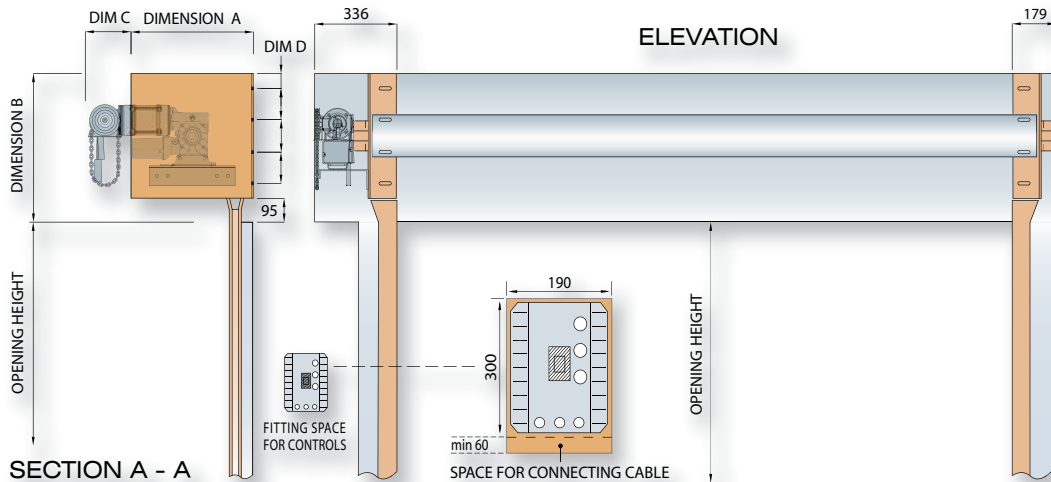

WIDTH	HEIGHT	DIM A	DIM B	DIM C	DIM D
2500	2800	400	450	221	20
4000	4000	400	450	221	20
5000	5000	450	500	294	35
6000	6000	500	550	234	60

Door hood addition - Dim B + 50 All Dimensions in mm

