

**THE
'ULTRA RESPONSIVE'
SOLUTION**

INSULATED ROLLER SHUTTERS

SHUTTER CURTAIN

Constructed from pre-galvanised material. Ecotech formula foam infill - CFC free/ODP zero with a low global warming overall 'U' value of 4.8 W/m²K. Each panel section is 94mm deep with multi-ribbed face for rigidity.

OPERATION

Operation via Safedrive® Fi Drive unit with built-on frequency inverter with high precision worm drive gear box with integral safety brake system to British and European standards for industrial doors BS 12604:2002. Mechanical aspects and BS 12453:2001 safety in use of power operated doors. Drives are designed for a typical door size to have a life of more than 20,000 cycles and for use up to 6 times per hour. The drive is fitted with low level manual operation in accordance with EN 12453 and 12604 hand force up to 390N is permissible for large, heavy doors. Manual operation is only used for closing the door. In case of Safedrive® units fitted with electric brakes, manual operation is carried out against the brake.

ORDER INFORMATION

JOB No:

ORDER No:

OPENING WIDTH:

OPENING HEIGHT:




GUIDE TYPE:

DELIVERY DATE:

DELIVERY ADDRESS:

GENERAL NOTES:

EUROSPEED - THE **ULTRA RESPONSIVE** SOLUTION

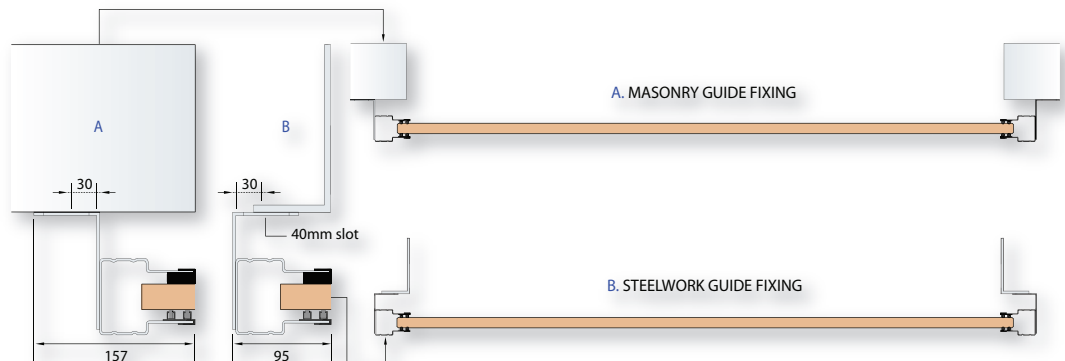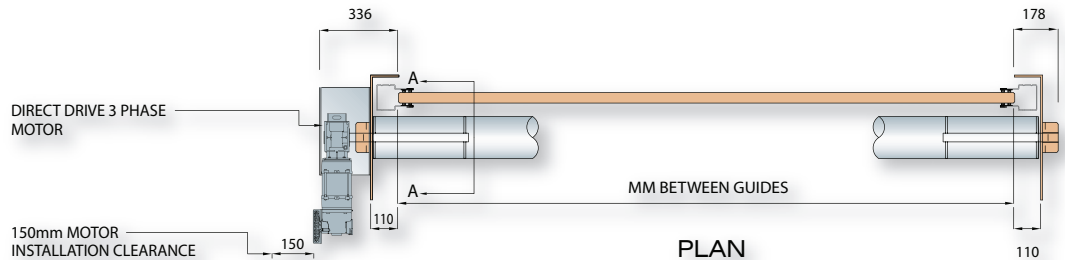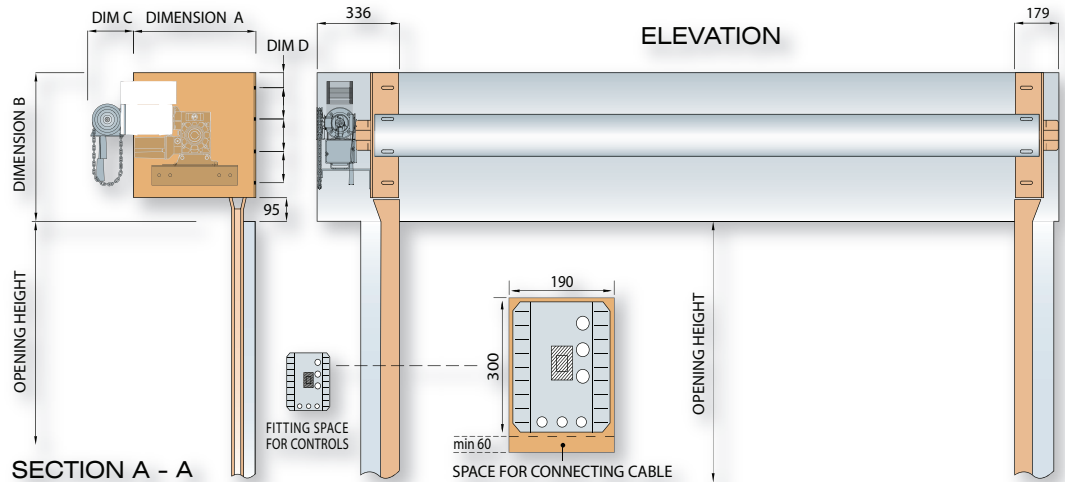

WIDTH	HEIGHT	DIM A	DIM B	DIM C	DIM D
2000	2000	350	450	235	25
3000	3000	350	550	235	25
4000	4000	400	595	229	20
5000	5000	450	645	285	35
6000	6000	500	695	235	60

Door hood addition - Dim B + 50 All Dimensions in mm

